

### 产品特征

#### Product Features

- 恒流模式和恒压模式输出可选（客户定制选择）  
Selectable constant current and constant voltage output.(Custom on request)
- 全隔离，最大输出功率80W  
Full-ioslated,delivering up to 80W of power.
- 短路、过流和过压保护。  
Short circuit,over current and over voltage protection.
- 防火环保PC塑料外壳  
Fireproof environmental protection PC plastic cover
- 符合世界照明安全规范标准  
In line with the world lighting safety standards
- 5年质保  
5 years quality warranty



### 电气规格

#### Electrical specifications




|               |                                  |                                                                                                          |        |        |        |                          |        |
|---------------|----------------------------------|----------------------------------------------------------------------------------------------------------|--------|--------|--------|--------------------------|--------|
| 输入<br>Input   | 电压范围<br>Voltage range            | 90-130&180-240V/AC                                                                                       |        |        |        |                          |        |
|               | 频率范围<br>Frequency range          | 50-60Hz                                                                                                  |        |        |        |                          |        |
|               | 功率因数<br>Power factor             | >0.95                                                                                                    |        |        |        |                          |        |
|               | 满载效率<br>Full load efficiency     | ≥85%                                                                                                     |        |        |        |                          |        |
|               | 交流电流<br>AC current               | 0.85A/0.42A                                                                                              |        |        |        |                          |        |
| 输出<br>Output  | 输出模式<br>Rated current            | 恒流模式<br>Constant Current                                                                                 |        |        |        | 恒压模式<br>Constant Voltage |        |
|               | 额定电流<br>Rated current            | 1100mA                                                                                                   | 1500mA | 1800mA | 2200mA | 6000mA                   | 3300mA |
|               | 电流精度<br>Current accuracy         | ±5%                                                                                                      | ±5%    | ±5%    | ±5%    | ±10%                     | ±10%   |
|               | 输出电压范围<br>Output voltage range   | 50-72V                                                                                                   | 37-53V | 30-44V | 25-36V | 12V                      | 24V    |
|               | 额定功率<br>Rated pwer               | 80W                                                                                                      |        |        |        |                          |        |
| 保护<br>protect | 短路保护<br>Short circuit protection | 间歇重启模式，异常排除后可自动恢复<br>Intermittent restart mode, after the exception can be automatically restored        |        |        |        |                          |        |
|               | 过流保护<br>Overcurrent protection   | 打嗝模式，过流异常排除后可自动恢复<br>Hiccup mode, after the removal of abnormal flow can be automatically restored       |        |        |        |                          |        |
|               | 过压保护<br>Overvoltage protection   | 打嗝模式，过压异常排除后可自动恢复<br>Hiccup mode, after the exception of abnormal pressure can be automatically restored |        |        |        |                          |        |

|                   |                                           |                                                    |
|-------------------|-------------------------------------------|----------------------------------------------------|
| 环境<br>Environment | 工作温度、湿度<br>Operating Temperature/humidity | -30- 45°C,5- 95%RH                                 |
|                   | 储存温度、湿度<br>Storage Temperature/humidity   | -40- 70°C,5- 95%RH                                 |
|                   | 温度系数<br>Temperature coefficient           | ± 0.03%/°C(0- 50°C)                                |
|                   | 耐振动<br>Vibration                          | 5- 55Hz/2g,30 Mimutes                              |
| 安规和EMC<br>Safety  | 安全规范<br>Safety                            | EN60598                                            |
|                   | 耐压<br>Pressure                            | I/P- O/P:3KVAC IP- FG:1.88KVAC O/P-FG:0.5KVAC      |
|                   | 绝缘阻抗<br>Insulation resistance             | I/P- O/P I/P- FG O/P- FG:100M Ω /500VDC/25°C/70%RH |
|                   | 电磁兼容发射<br>EMC Emission                    | EN55022,EN55015 Class B                            |
|                   | 电磁兼容抗扰性<br>EMC Immanity                   | EN61547,ENV5024,EN61000-4-2/3/4/6/8/11             |
| 其它<br>Other       |                                           | 250g                                               |
|                   | 尺寸<br>Size                                | 170*50*29mm                                        |

### 外壳结构


Shell structure

单位：毫米  
Units:mm

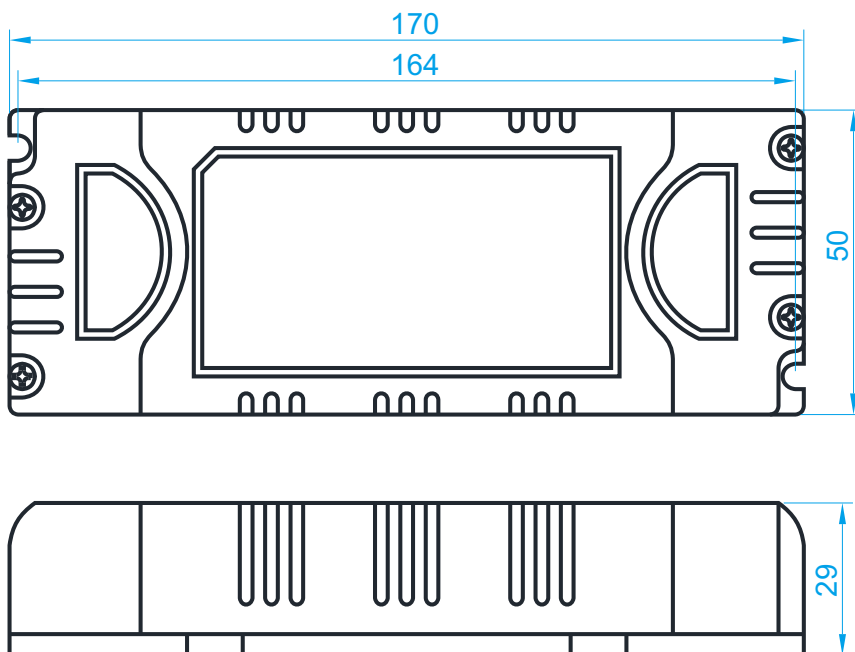

### 0/1- 10V调光接线图

### 0/1-10V dimmer wiring diagram

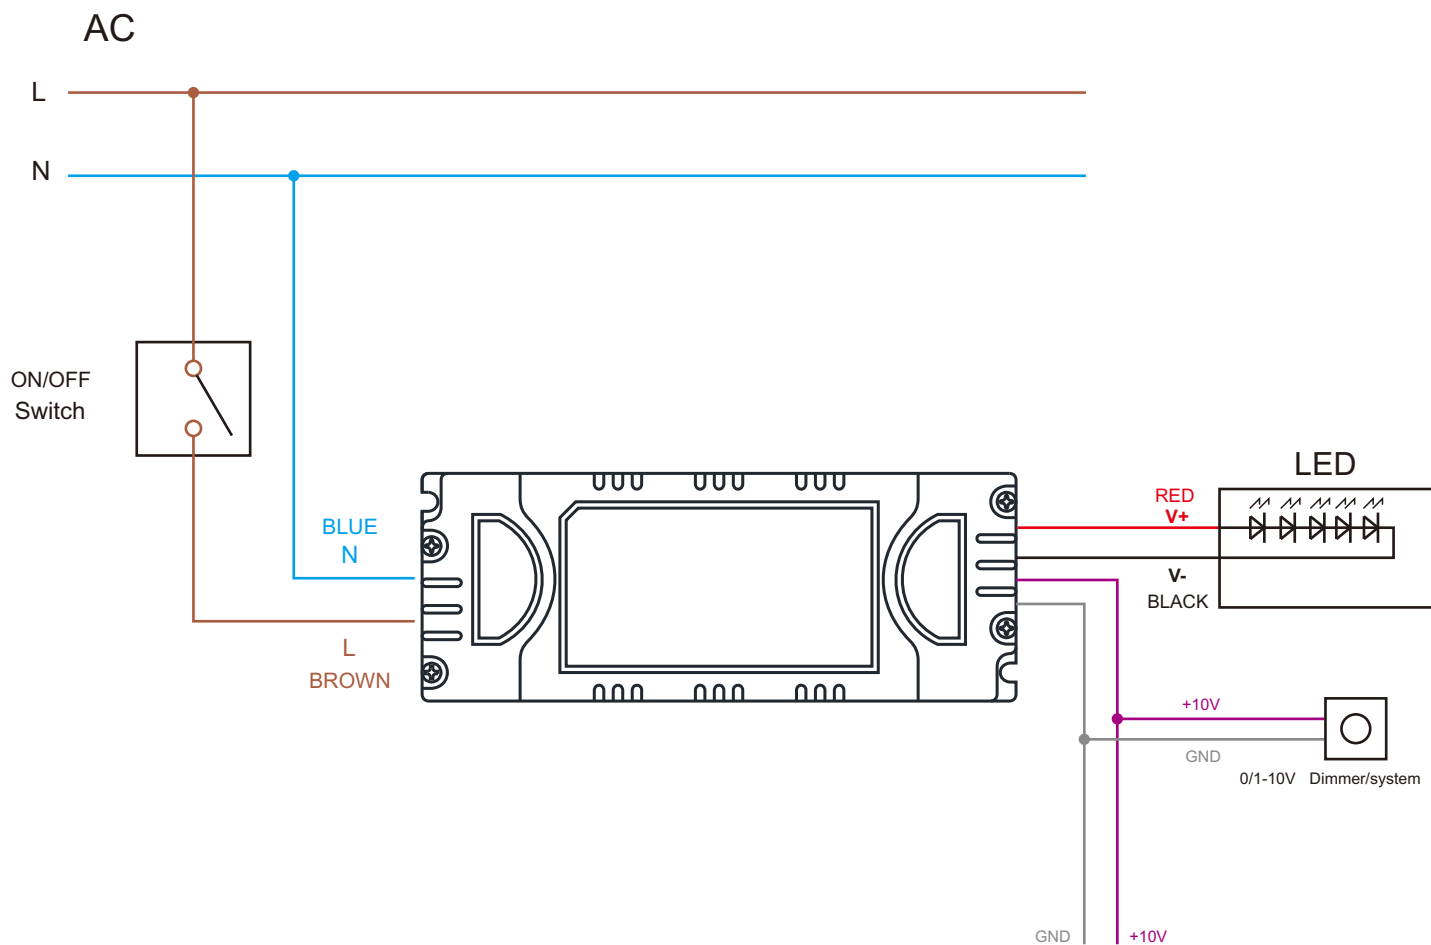

### 包装

### Packing

